



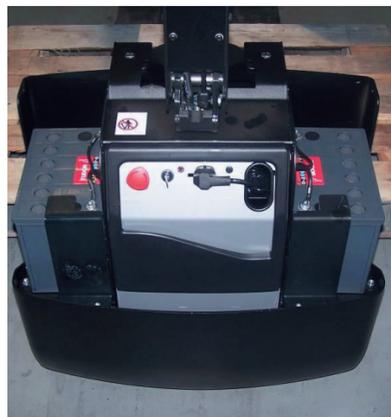

COMPACT, RELIABLE, HELPFUL ELECTRIC HANDPALLET TRUCKS

Compactness & Manoeuvrability

Thanks to the compact chassis with a total width of only 700mm and overall machine length of only 420mm, the new CESAB Agile can fit in the tightest of spaces. The central swing arm with a 208° steering angle, allows the operator to drive the truck into any kind of aisle. The combination of compactness and manoeuvrability makes Agile the ideal truck for use in confined areas.

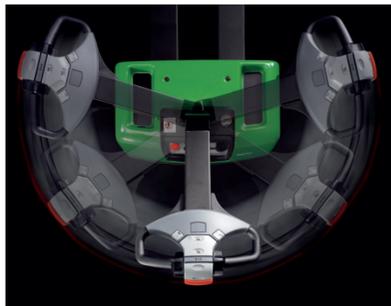

Moreover, it gives the possibility to recharge it anywhere at any time. It is important to remember that although Agile can be charged throughout the day's working cycle, it is necessary to allow the truck to a full charging cycle at least once a week.

The CESAB Agile is best suited to applications like gas stations, general shops, hypermarkets and all those sites that require a low intensive job in confined spaces. Its nature makes it ideal to help a truck driver to load or down load the truck with minimal effort.




Climber wheels with single wheels are standard. These allow the truck to negotiate with ease obstacles such as pallets frames or trucks' ramps. The In-vehicle charging option, allows the truck to be charged during transportation if the lorry is configured with this option.



Cesab Ltd:
Unit 10, Regent Park, Booth Drive, Park Farm South
Wellingborough, Northamptonshire, NN8 8R
Tel. +44 (1) 933 670 460 - Fax +44 (1) 933 679 859
e-mail: sales@cesab.net

Productivity in Safety

CESAB takes high productivity while observing top safety measures, very seriously. The red push-button at the top of the handle not only ensure that if pressed against the operator it stops the reverse traction, but it momentarily enables a forward traction to avoid the operator being hurt. The unique castor link wheel design keeps the truck in a steady position even if operating on uneven surfaces.

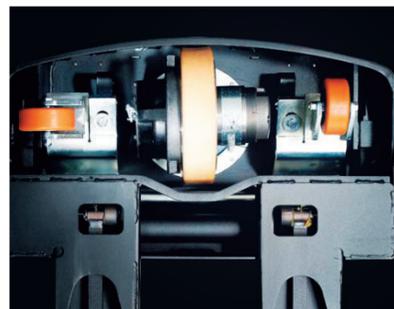

OPTIONS & FEATURES	
Bogie fork wheels	O
Castor link system	S
Climber wheels	S
Storage compartments	S
Fingertip controls	S
208° steering	S
Electronic speed control	S
Automatic parking brake	S
Emergency collision button	S
Load support	O
Built-in charger	S
In-vehicle charging	O
Battery indicator	O

S = Standard O = Optional

Everything under control

The ergonomic design of the multifunctional handle and the "within-reach" positioning of the various commands allows the operator to use every function with extreme ease.



Your Local Dealer

Agile

ELECTRIC PALLET TRUCKS WITH STEERING ARM

The CESAB Agile model is a small and handy electric pallet truck. Powered by a SEM (Separately Excited Motor), it is designed to handle all types of horizontal pallet movements in light applications. It is the ideal upgrade from a hand pallet truck.

- **SEM (Separately Excited Motor)**
- **Built-in charger for easy charging**
- **Two 12 volt 63 Ah batteries**
- **standard Climber wheels with single wheels**
- **Forks fitted with grease-able bushings**
- **208° steering angle**



0342070 - 04/07


CESAB S.p.A. products, specifications and technical data are subject to change without notice.

Agile

Technical Details		Agile
Rated capacity	kg	1300
Load centre	mm	600
Weight without battery	kg	200
Max. axle load drive wheel, without/with rated load	kg	175/570
Max. axle load castor wheels, without/with rated load	kg	2x30 / 2x24
Max. axle load fork wheels, without/with rated load	kg	18+18/496+496
Castor wheels, polyurethane	mm	Ø 100 x 40
Fork wheels, single, polyurethane	mm	Ø 85
Drive wheel, Tractothan	mm	Ø 250 x 60
Travel speed, without/with rated load	km/h	5.5 / 4
Lift speed, without/with rated load	m/s	0.07 / 0.04
Lowering speed, without/with rated load	m/s	0.04 / 0.04
Gradient, without/with rated load	%	10 / 5
Service-/parking brake		electromagnetic
Drive motor/short-time rating (S2 60')	kW	0.5
Lift motor/Intermittent rating (S3 10%)	kW	1.2
Steering system		steering arm
Speed control, number of steps		transistor, step-less
Steering arc	°	208

Dimensions, mm		Agile
x	Back of fork to single wheel centre, fork raised (l=1150)	937
y	Wheel base, fork raised/lowered (l=1150)	1199,1252
h3	Lift height	205
h14	Height of handle in neutral position	1270
h13	Height of lowered fork	85
b1	Chassis, width	700
l2	Truck length incl. back of fork	420
e	Fork width	156
l	Fork length	910,1000,1150
b5	Width across fork	450 / 520 / 685
m1	Floor clearance under mast	48
Ast	Aisle width, min (Pallet 800x1200 mm)	1873
Wa	Turning radius	1410

Battery and charger		Agile
b2	Battery capacity	Ah 63
b5	Battery charger	A 8
b4	Voltage	V 2x12
b14	Battery weight	kg 2x23

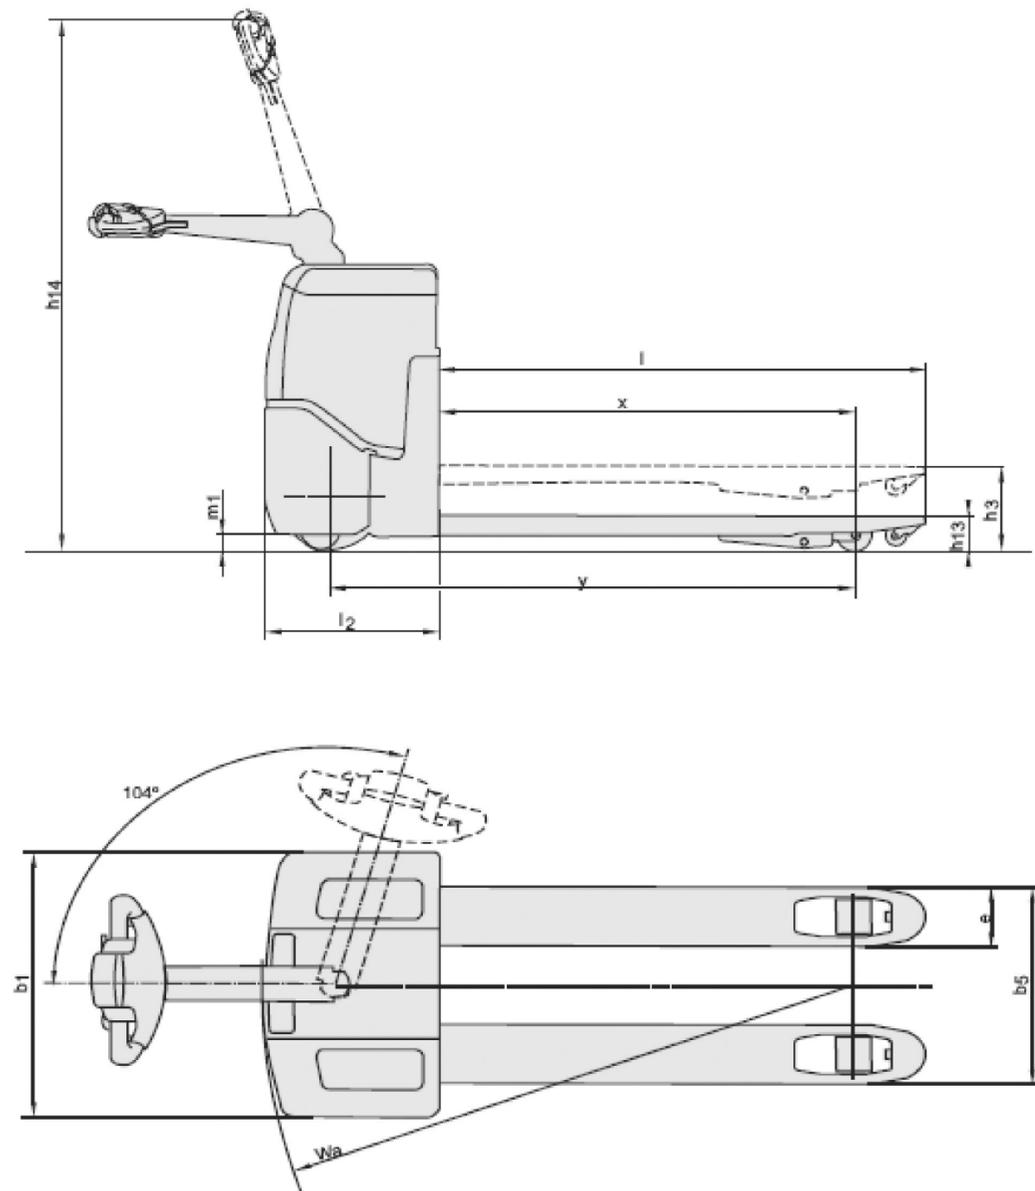

Performance may vary due to motor and system efficiency tolerance and represents nominal values obtained under typical operating conditions.

BT Products AB products and specifications are subject to change without notice.
Data are based on VDI 2198